

PAUL SCHERRER INSTITUT



eurad
European Joint Programme
on Radioactive Waste Management



D. Rochman

Estimation of decay heat from Spent Nuclear Fuel: a PSI example

2nd Research Coordination Meeting on the CRP on Spent Fuel
characterization, IAEA, Kalmar, Sweden, September 23, 2022



- Situation in Switzerland
- SNF decay heat characteristics
- Integrated simulation approach
- Best estimate code validation, biases and uncertainties for decay heat
- Direct/indirect decay heat validation
- International projects

EUropean Joint Programme on **RAD**ioactive Waste Management

EURAD

5-year implementation phase 1 – EURAD-1




This project receives funding from the Euratom research and training programme under grant agreement No 847593.

Current status and plans in Switzerland


- 4 running reactors, 1 shutdown
- Spent Fuel Assemblies (SFA, or SNF) are currently stored wet onsite, before transferred to wet or dry storage at independent facilities (two dry, one wet)
- By 2050 (base scenario),
 - about 2200 tHM SFA projected (~12 000 SFA)
 - about 130 BWR casks and 100 PWR casks
- By 2065, the final repository facility (BEVA) starts operation,
 - transport of casks to BEVA,
 - Unloading/loading to canisters (4 PWR SFA and 9 BWR SFA per canisters),
 - Example for BWR : >900 canisters
 - Example for PWR: >900 canisters

- SNF characteristics: burnup, enrichment, cooling



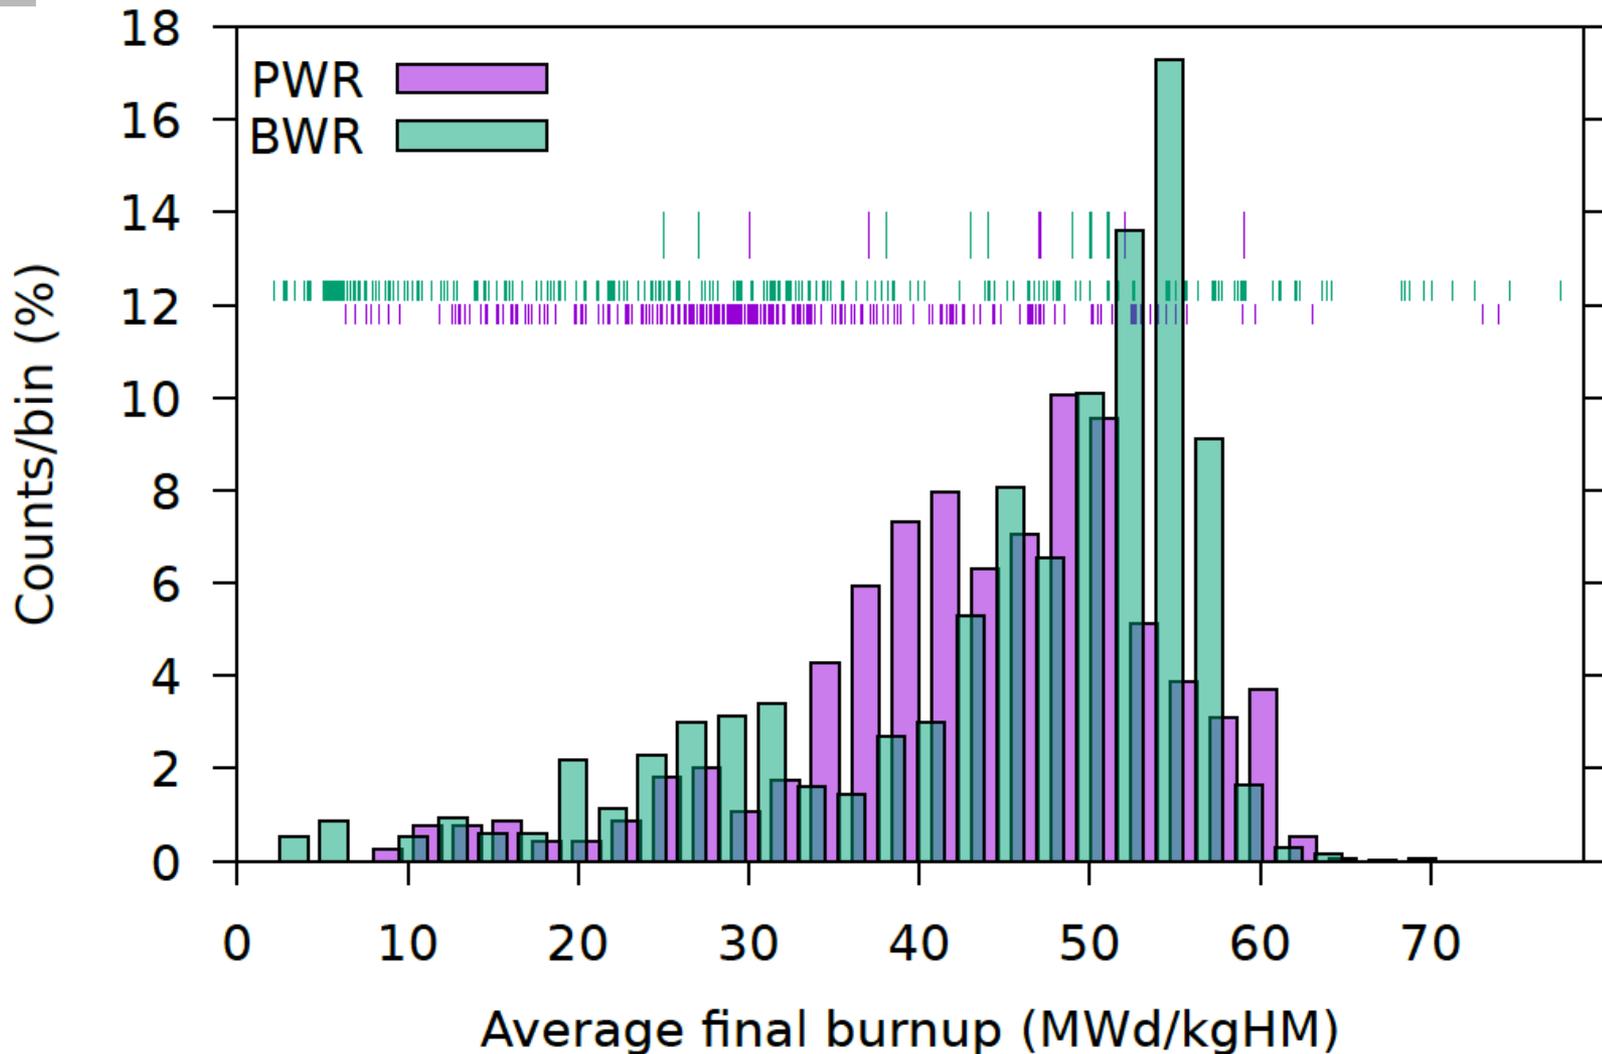


Representative SNF characteristics (\neq countries)

- SNF characteristics: burnup, enrichment, cooling

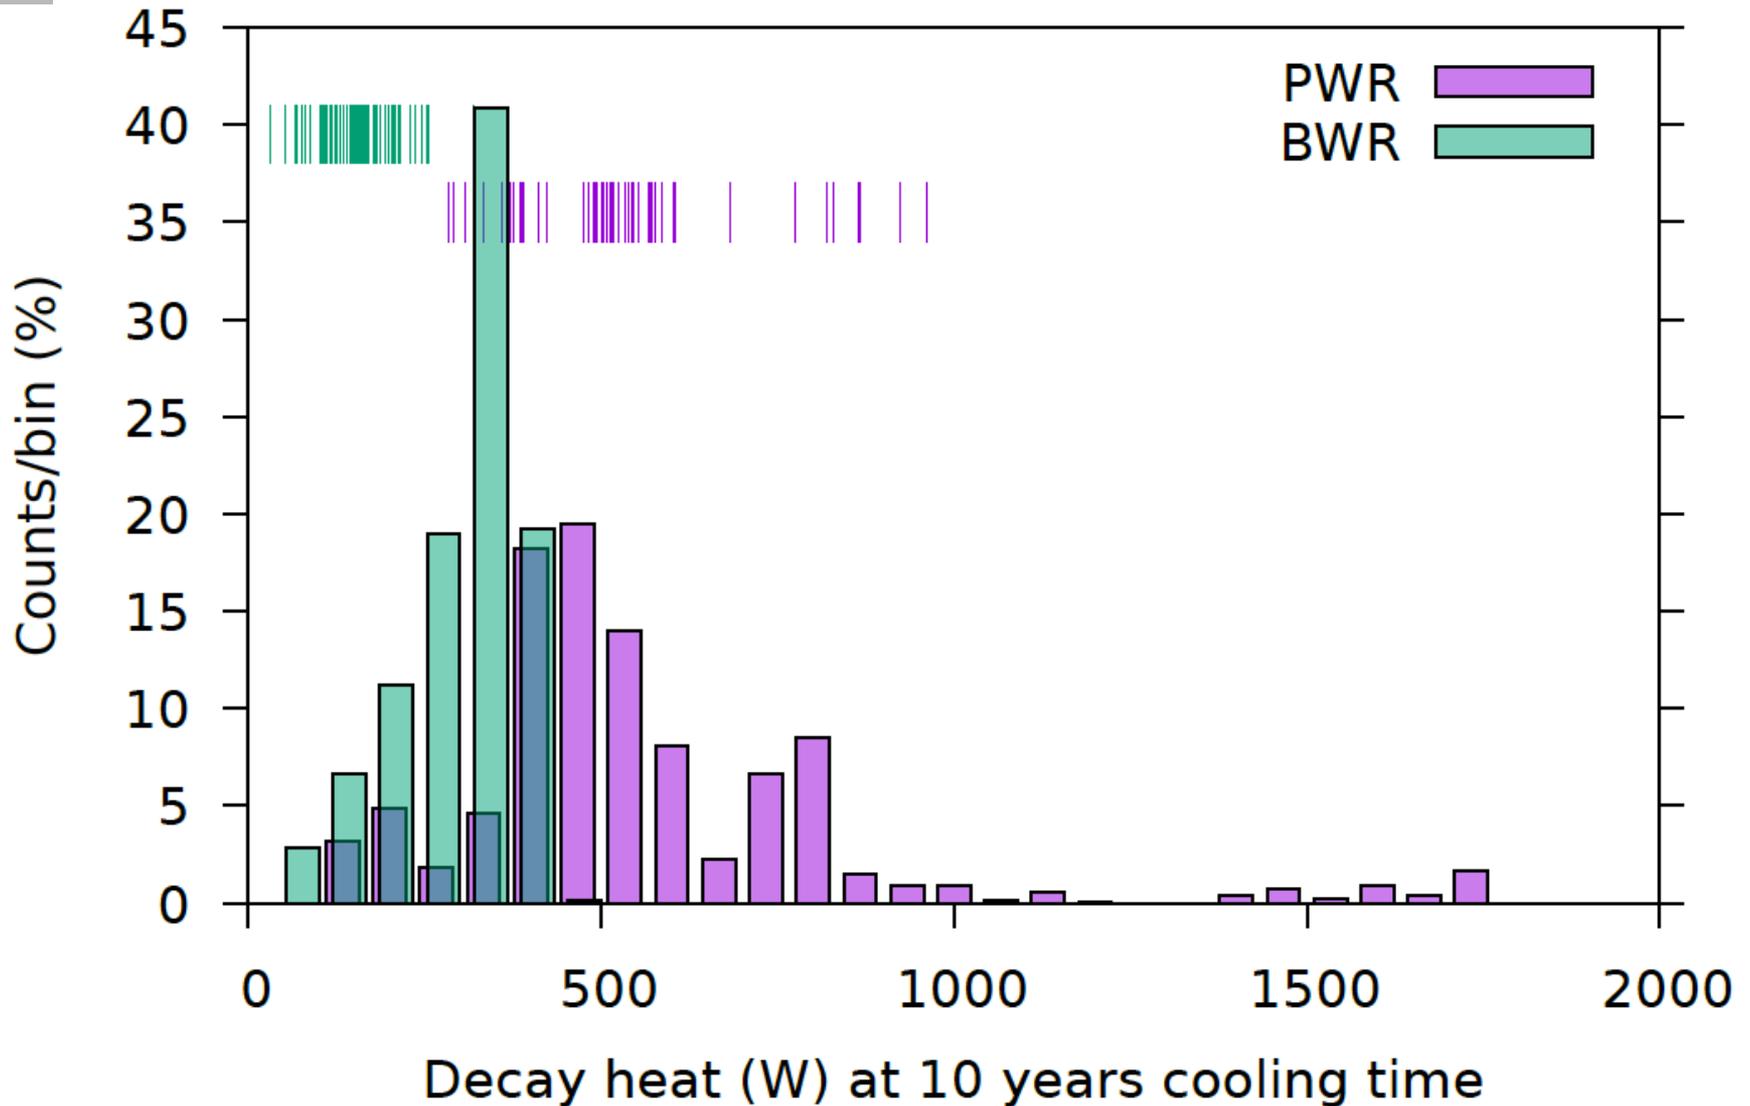


Which decay heat ?

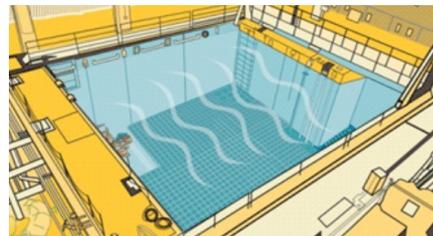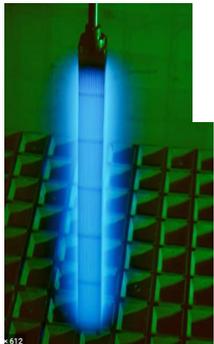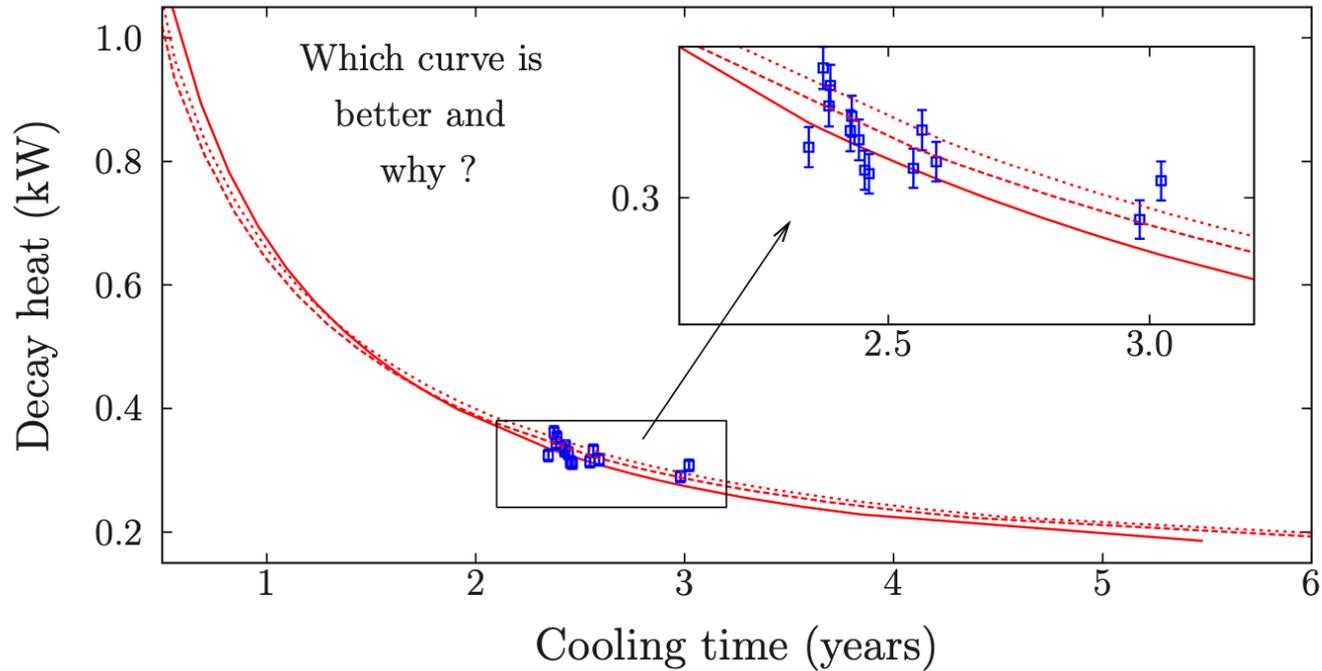

- Measured or calculated ?
- Best decay heat ?
- Bias & uncertainty ?


Representative SNF characteristics

- SNF characteristics: decay heat

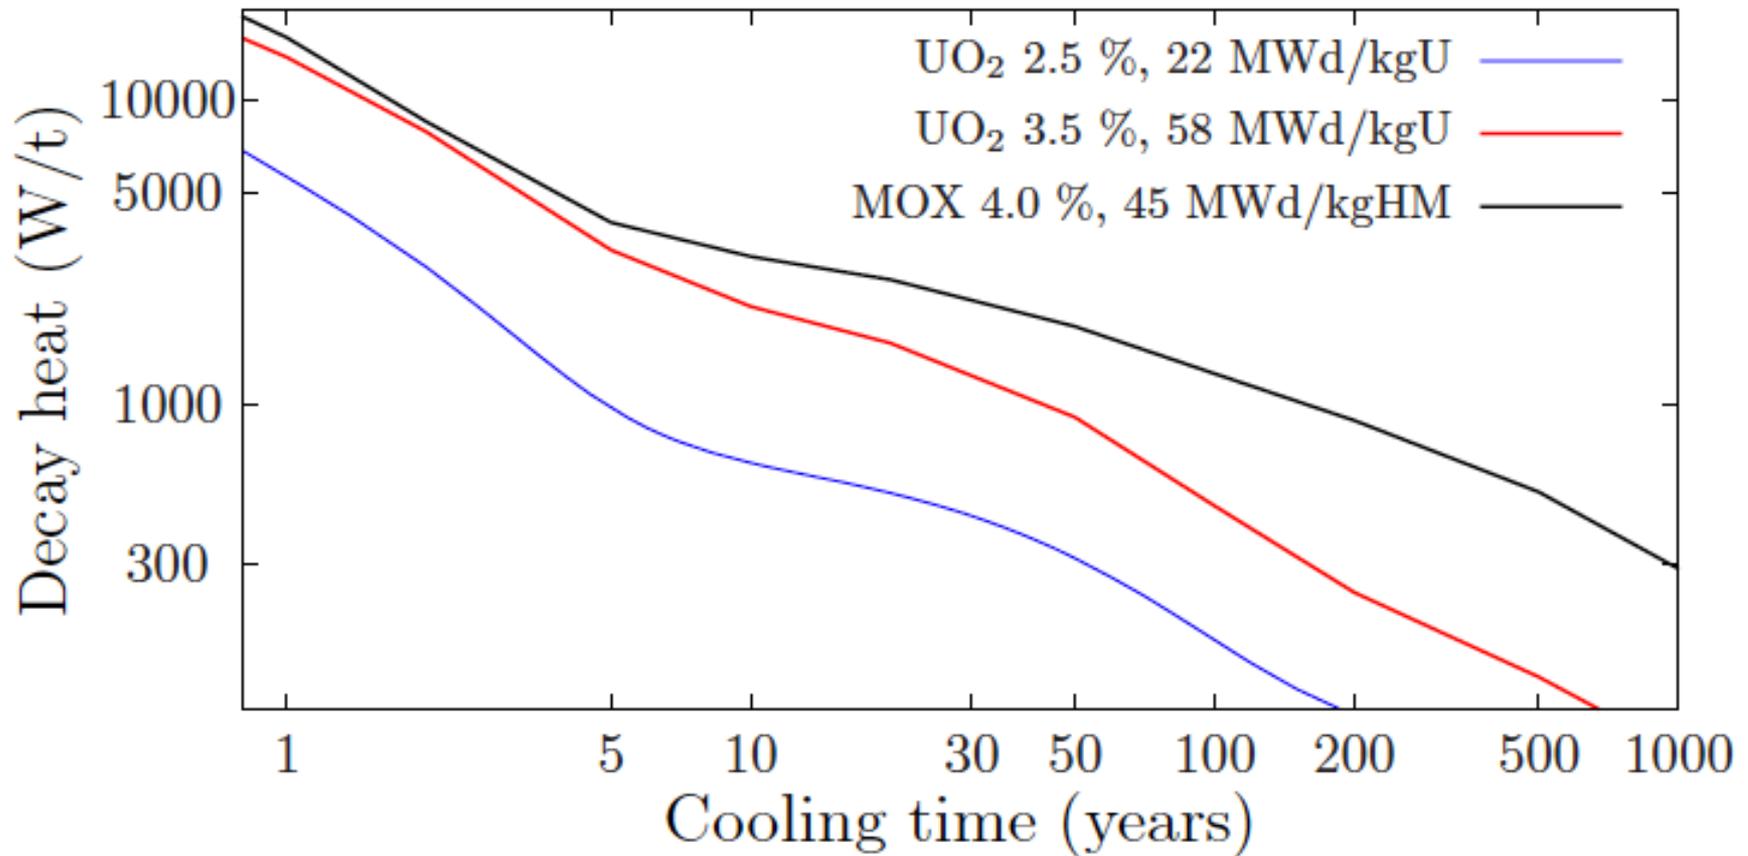

Representative SNF characteristics





- SNF characteristics: decay heat fraction (same isotopes for \neq SNF !)

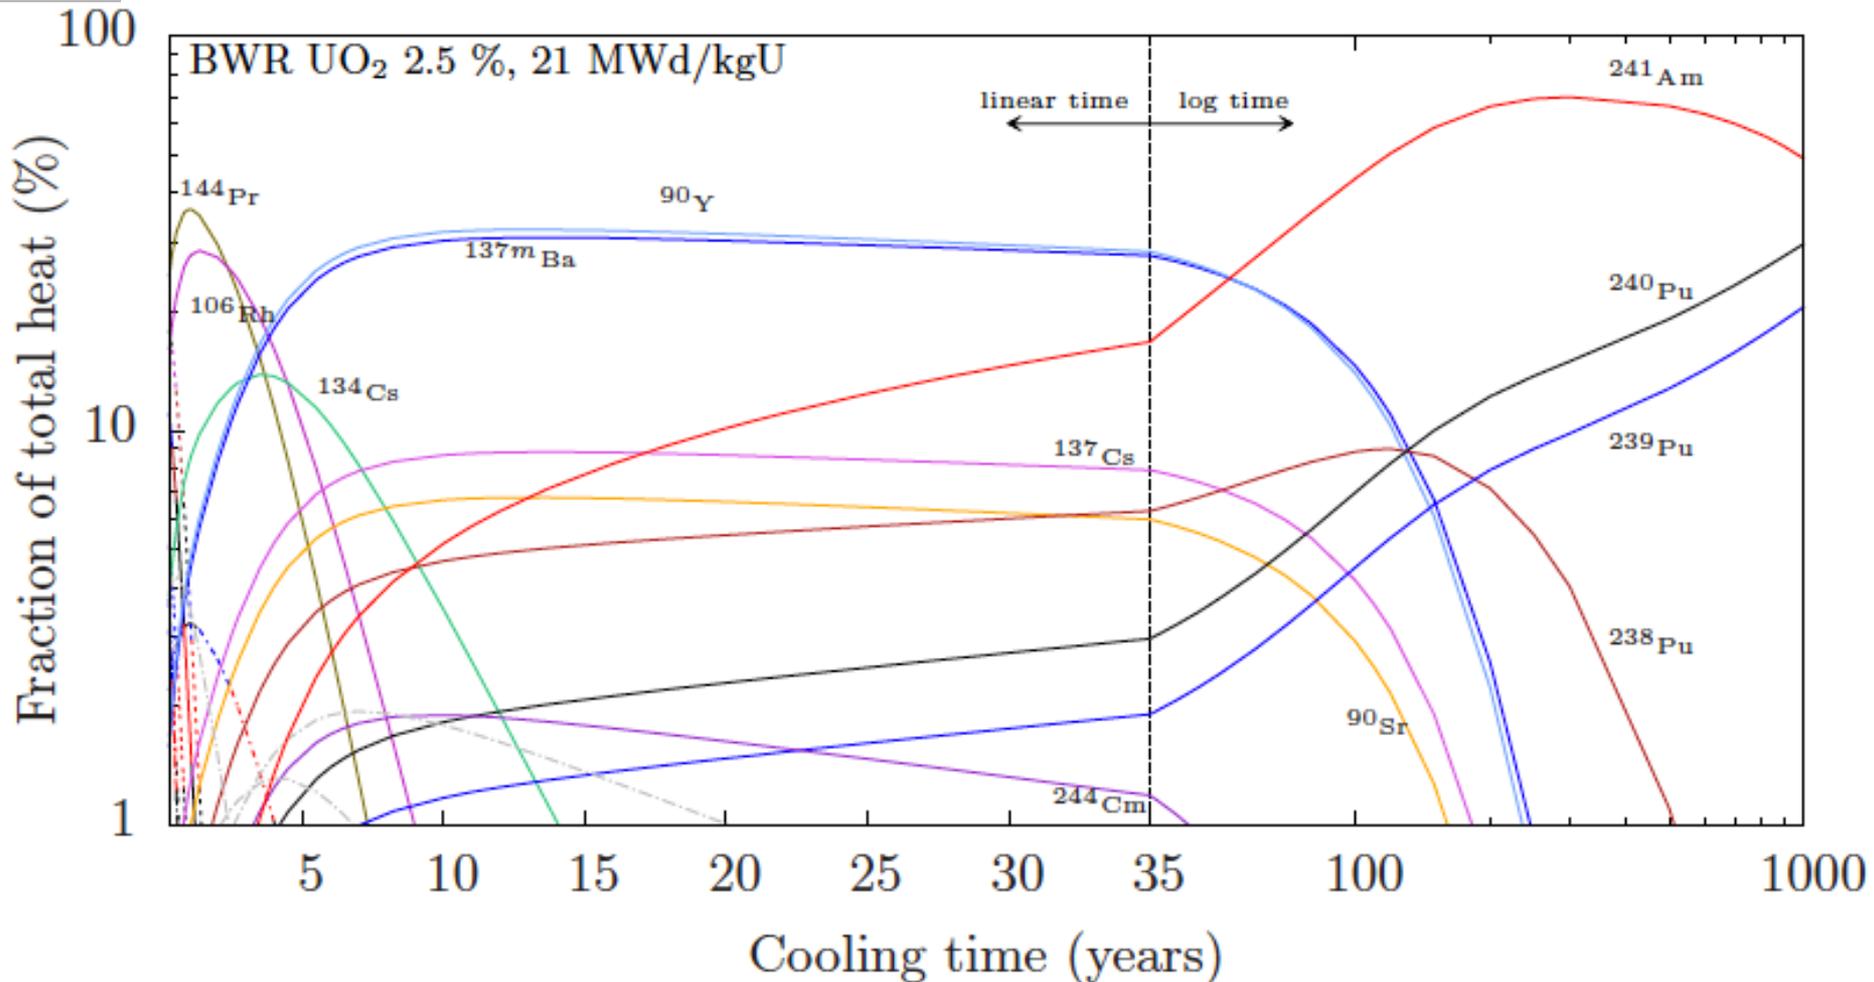

Acceptance Criteria for loading optimization

- Decay heat: limit per canister
- Criticality: k_{eff} for each canister must be below a limit
- Dose rate: for cask/canister transport, handling and monitoring

Dose

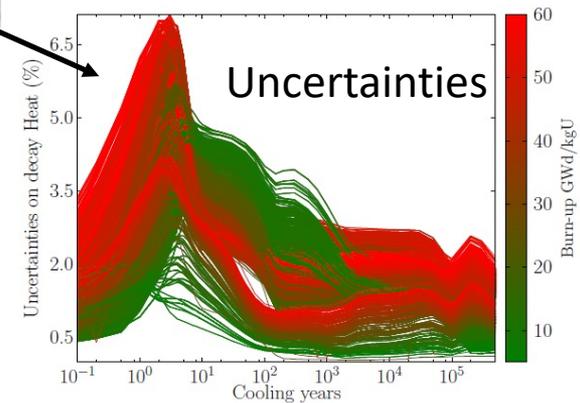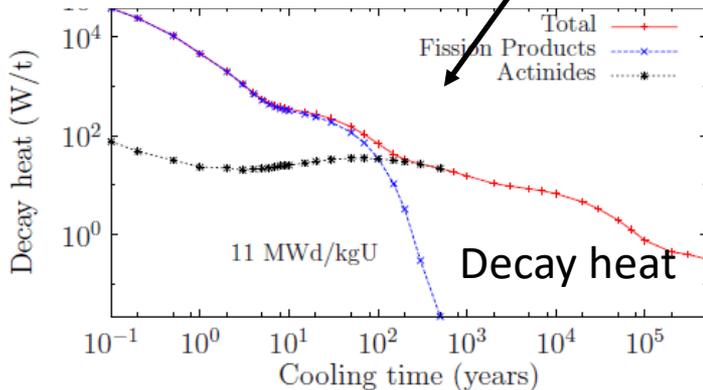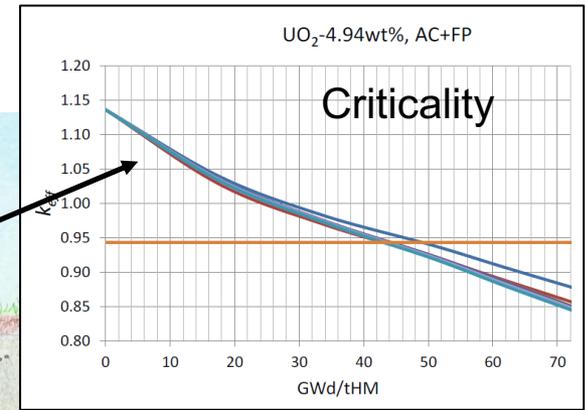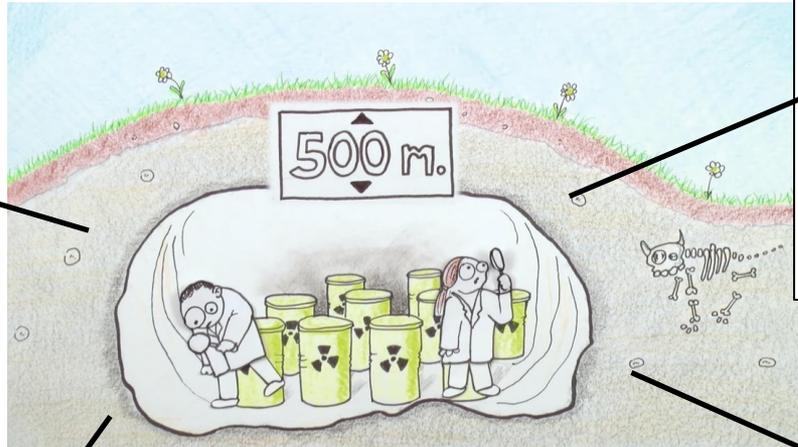

Why optimizing ?

- Considering current and future cask loading,
 - it helps to minimize SFA in pool
 - It helps to minimize plant operation costs after final shutdown
- In total, about 1800-1900 canisters needed at minimum (more realistically 2200). Given a price of 1 M\$/canister, minimization is important.
- It helps to design the BEVA capabilities (stations, storage, volume) and adjust its cost.
- Existing tools:
 - CASKLOAD (Studsvik)
 - SIMAN (NAGRA)
 - PSI developments

Spent Nuclear Fuel: Integrated approach










Nuclear data

core simulation

repository


fuel characteristics

spent fuel

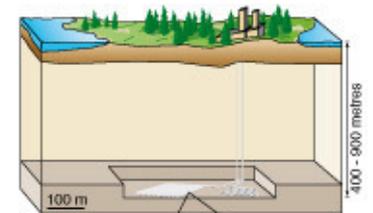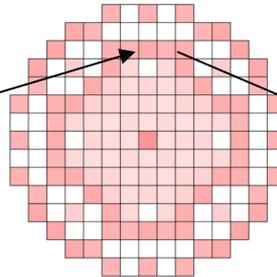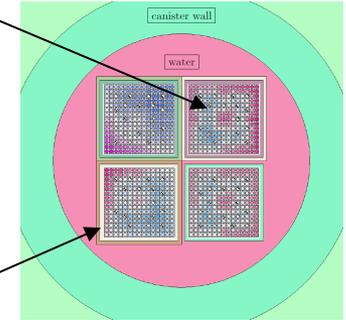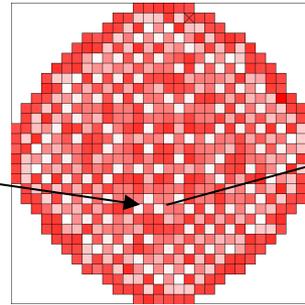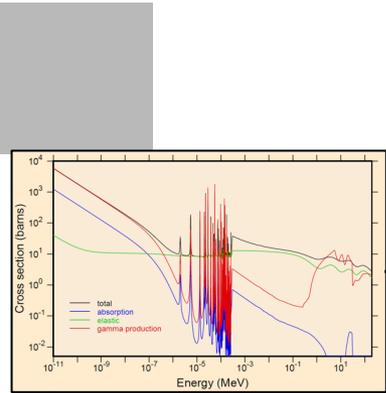


Our tools: CASMO/SIMULATE/SNF + CMSYS

- CMSYS: Validated database for irradiation history of the 5 Swiss reactors (cycles, assemblies,...)



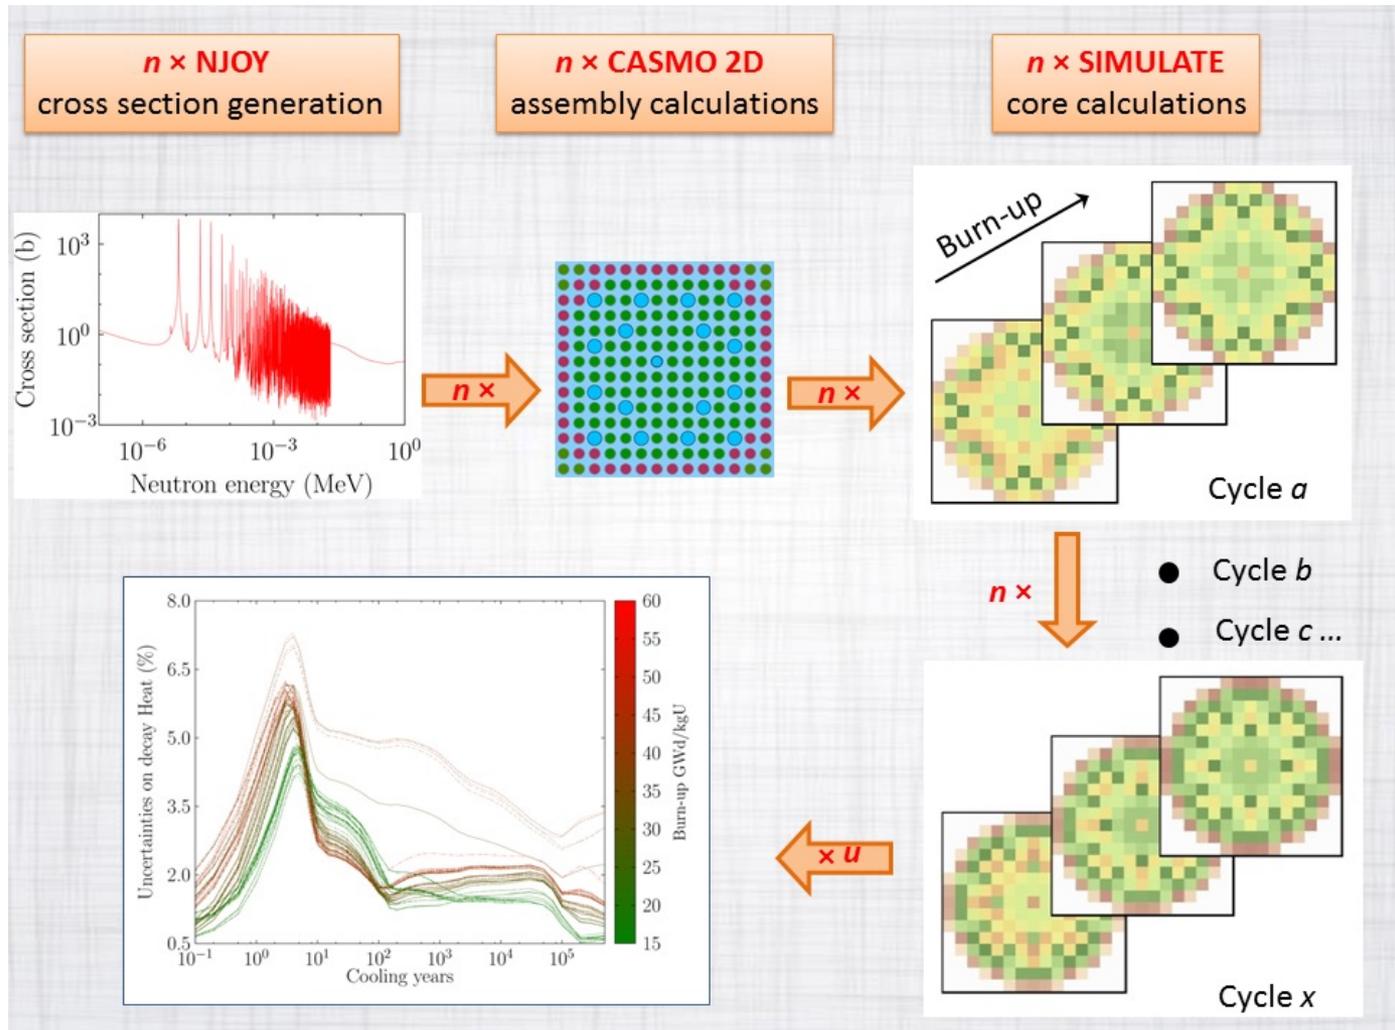


Example for uncertainty: assembly decay heat

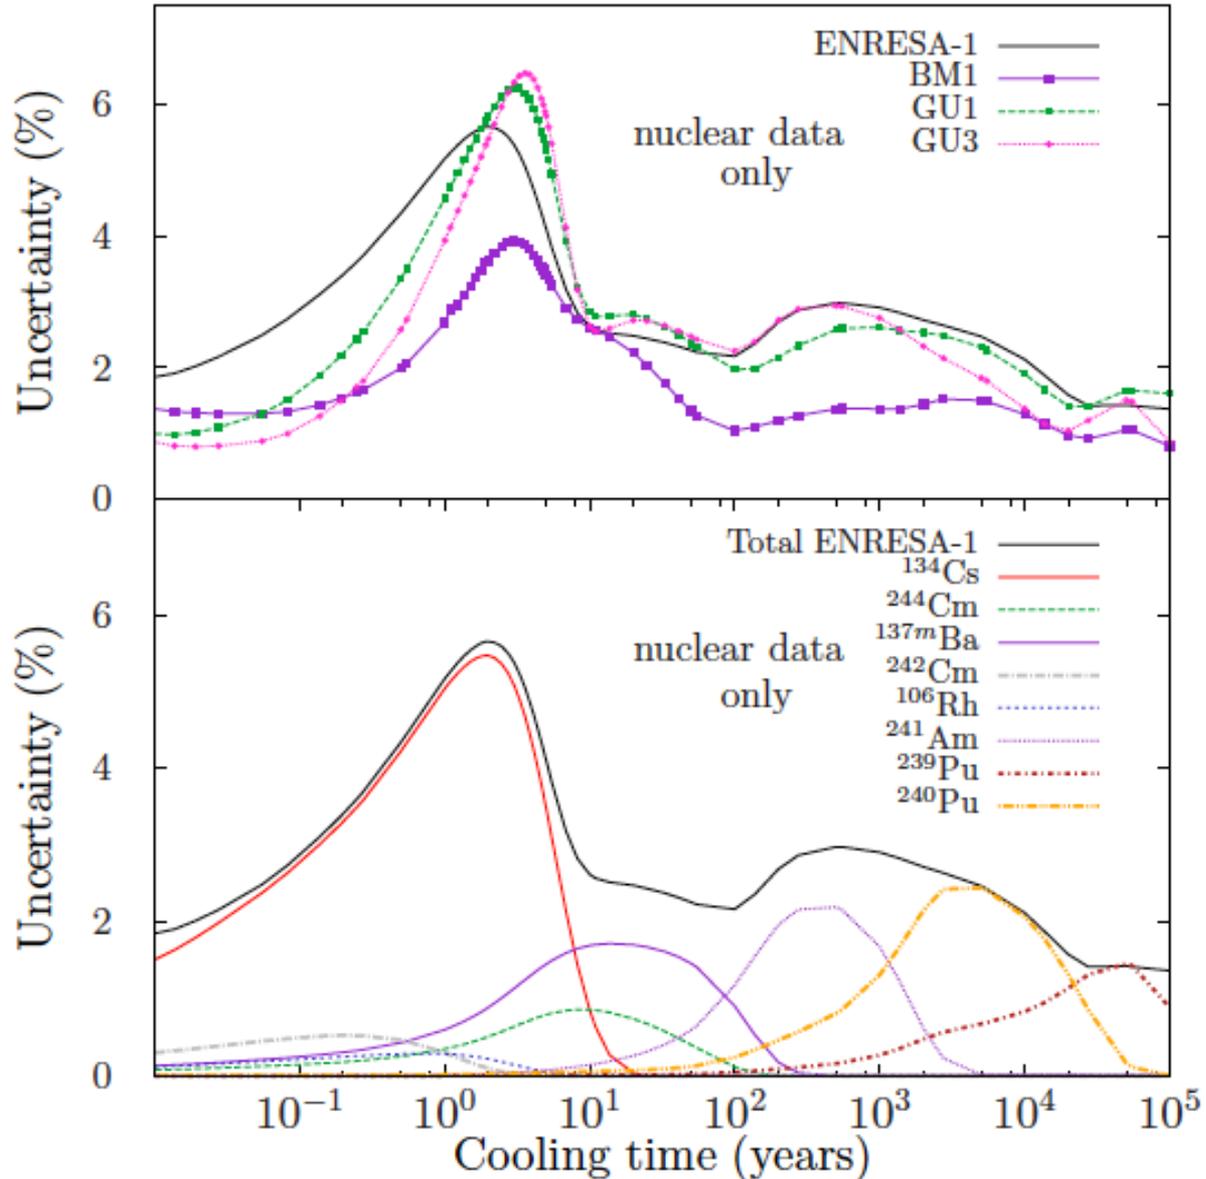

Decay heat uncertainties from different libraries

- 121 SNF at end of the 7th cycle

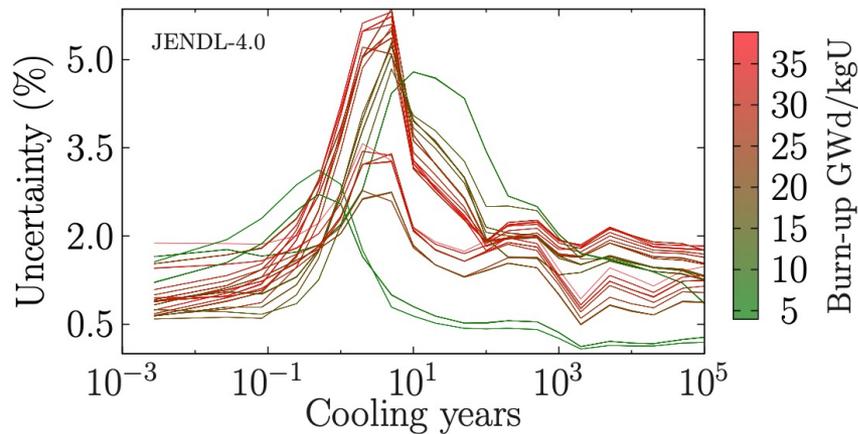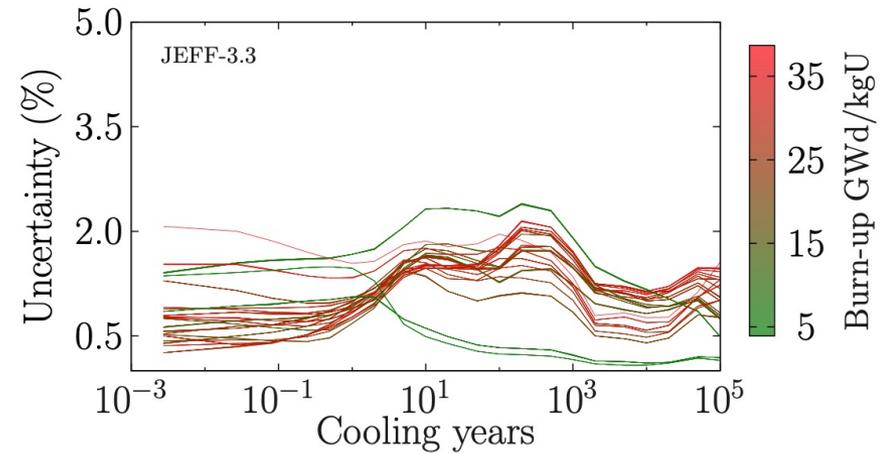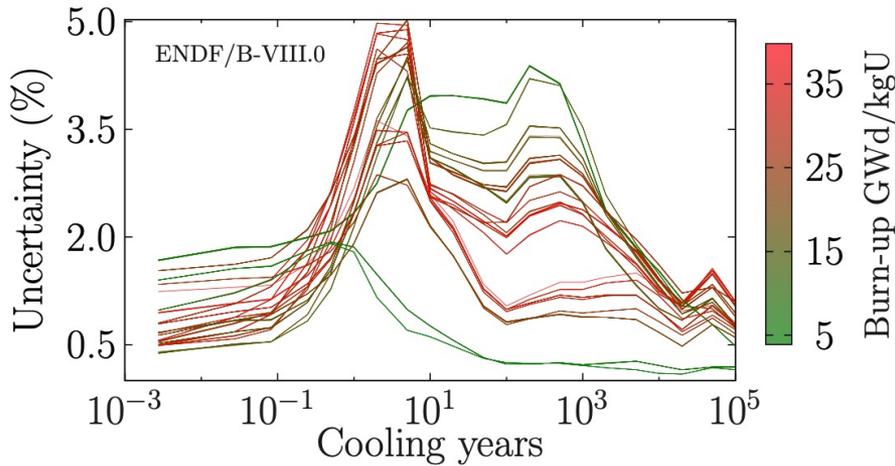

Indirect decay heat validation: nuclide concentrations

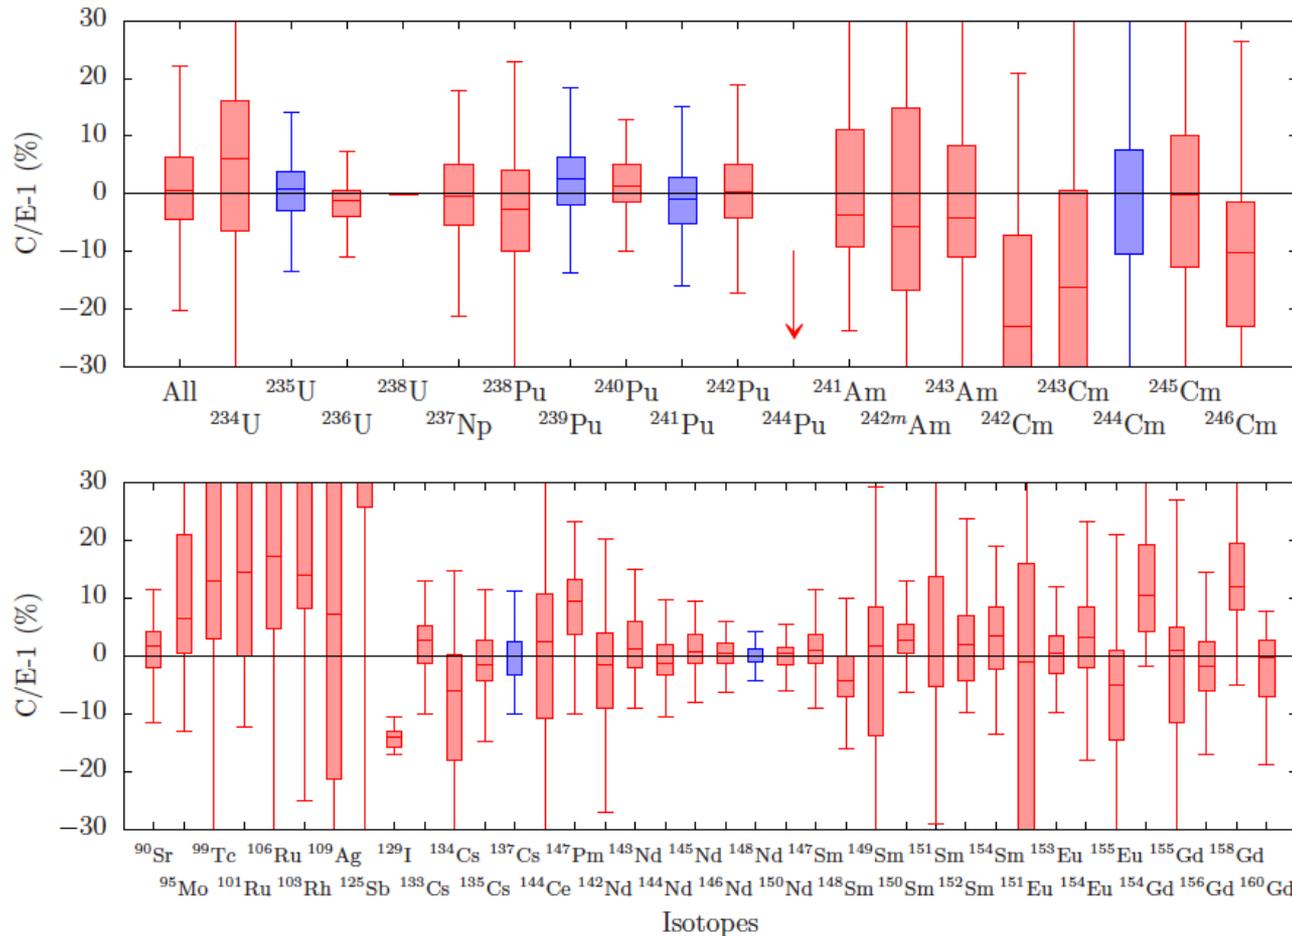


Fig. 4. Interquartile ranges for the $C/E - 1$ isotopic concentrations, considering a total of more than 12 000 measured concentrations. The blue color is given to important isotopes. See Tables 3 and 4 for numerical values.

Indirect decay heat validation: nuclide concentrations


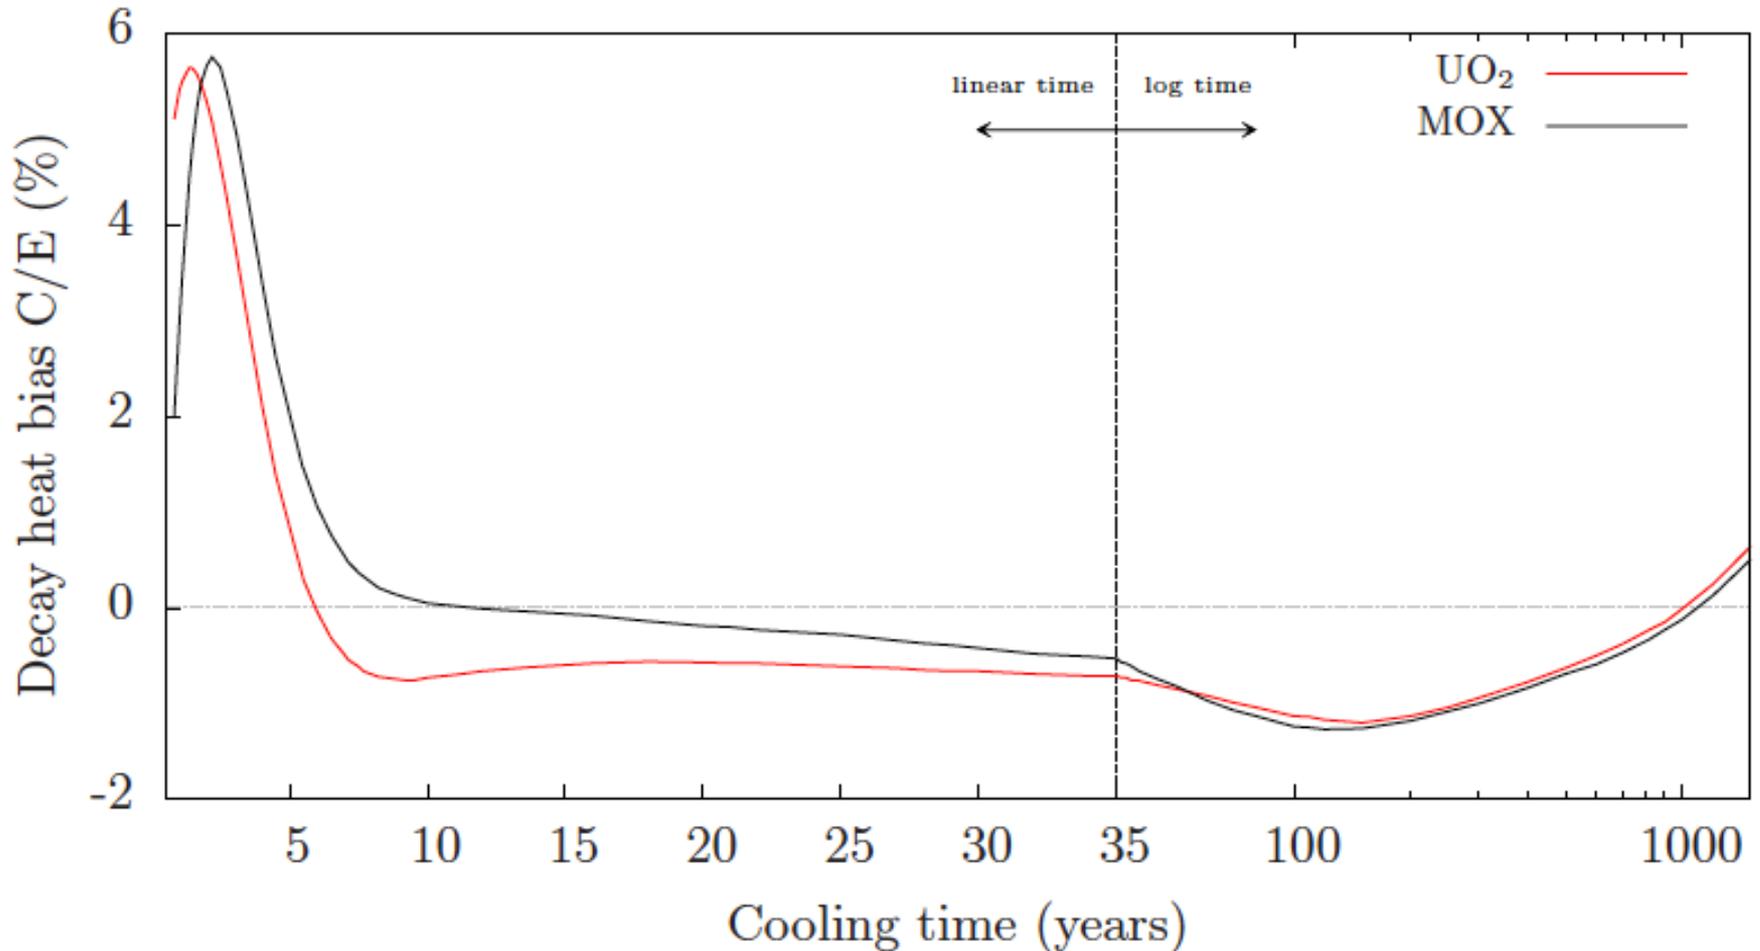


Fig. 9. Decay heat biases obtained from the mean biases on nuclide inventory.

Direct decay heat validation

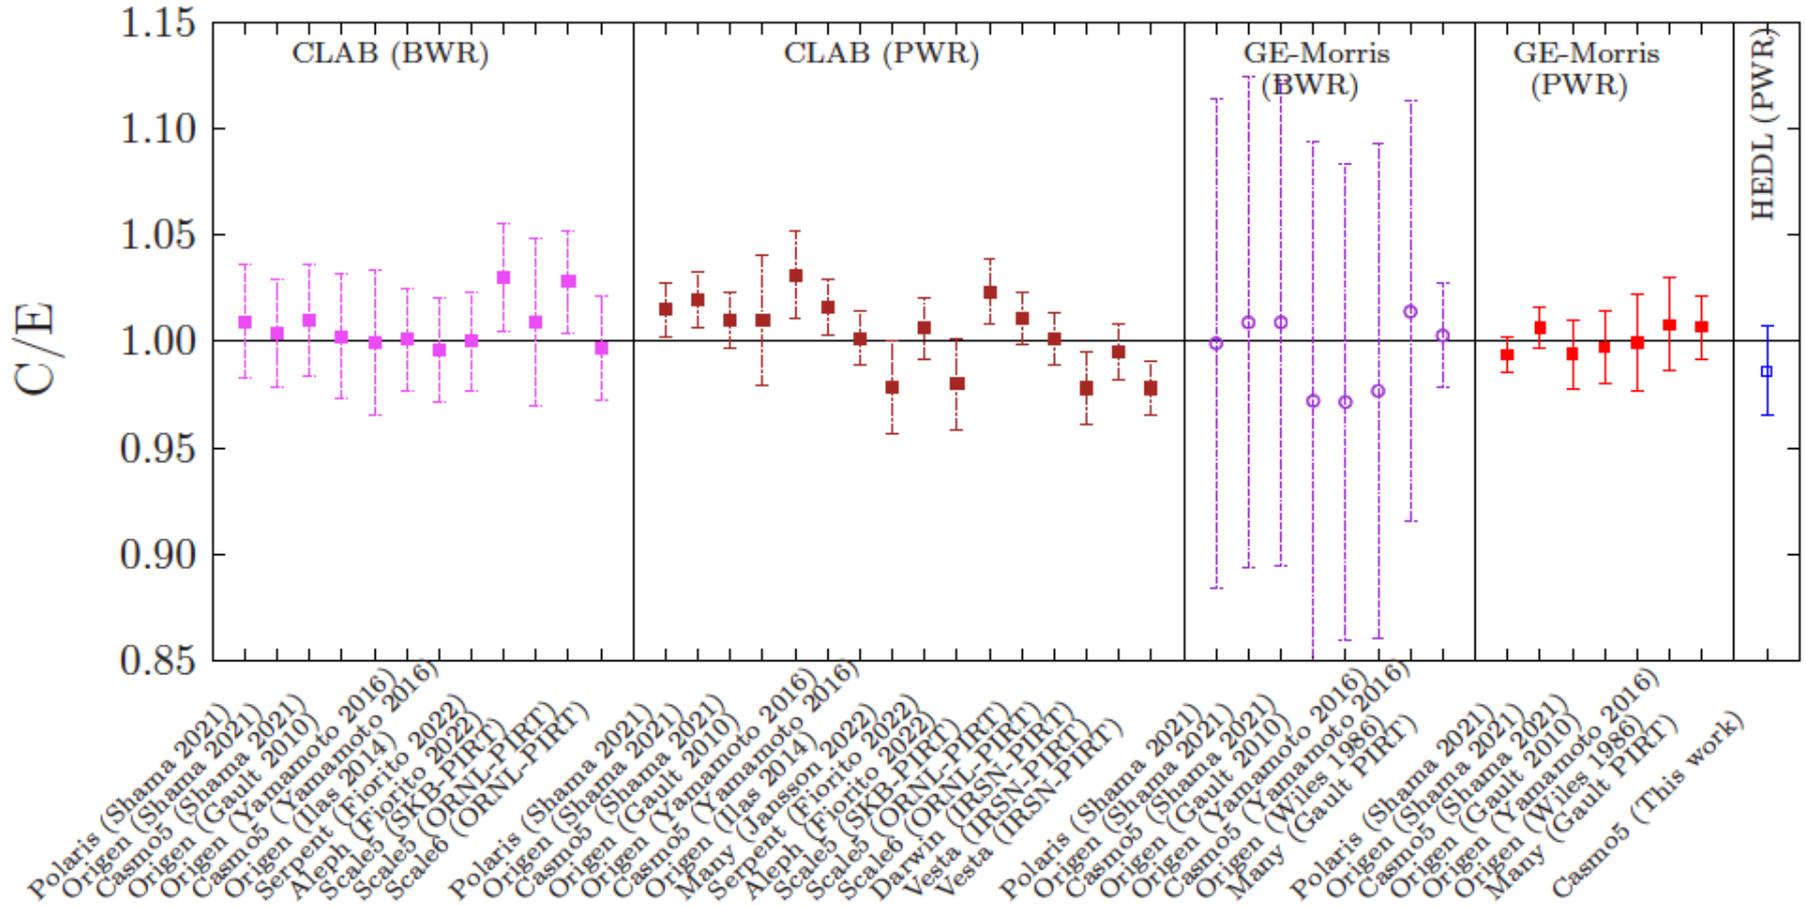

International projects

- European Joint Programme on Radioactive Waste Management (EURAD) WP8 on “Spent Fuel Characterization”
- Coordinated Research Project (CRP) on SFC was established by the International Atomic Energy Agency (IAEA)
- Electric Power Research Institute (EPRI): dedicated study on the state of the art regarding the estimation of SNF decay heat
- Working Party on Nuclear Criticality Safety (WPNCS) of isotopic compositions from SNF within the SFCOMPO database and its technical review group of the Nuclear Energy Agency (NEA)
- WPNCS Subgroup 10 (SG10), on “Nuclear Data Uncertainties Quantification on Spent Fuel Inventory”
- WPNCS Subgroup 12 (SG12), dedicated to “Spent nuclear fuel decay heat: assessing the confidence level in experimental and computational estimations (SNF-DH)”

Conclusion

- Decay heat is one of the most important quantities for SNF
- Code validation is a requirement (best estimate, bias and uncertainty)
- Canister filling optimization is natural

-
- Direct measurements are scarce (and correlated): need for new (independent) measurements
 - Existing open-source database do not cover all realistic SNF characteristics, such as decay heat
 - Calculated decay heat is rarely known better than a few %

Wir schaffen Wissen – heute für morgen

